

NPN

New Product News



T-TURN C-ADAPTER

Head Changeable C-ADAPTER Line



KEY POINT

TaeguTec has launched a head changeable C-ADAPTER line that is compatible with HUSH-BORE heads.

The new head changeable C-ADAPTER expansion comes with several advantages: a head changeable design that reduces set-up time, a wider selection of heads for one adapter that enables an economical solution and the serrated coupling design ensures stable machining due to its improved clamping rigidity.


The new C-ADAPTER line is available in 4 different cutting lengths: 2.5xD, 3xD, 4xD and 5xD. Furthermore, the 5xD type uniquely features a carbide core that reduces vibration while machining.

Features

- Reduced set-up time for improved productivity
- Serrated coupling design for robust tightening
- Direct coolant supply to the cutting edge for improved chip evacuation and tool life
- Available in three coupling sizes: C4, C5 and C6
- Shank sizes available as standard items in 5 diameters: Ø16, 20, 25, 32, 40 mm
- Cutting lengths are available as standard items in 4 different sizes: 2.5xD, 3xD, 4xD and 5xD
 - 5xD is provided with a carbide core for improved machinability




▲ [HUSH-BORE NPN Download](#)

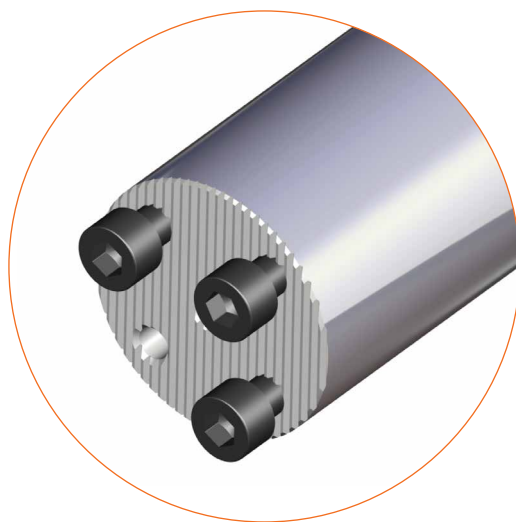


Serrated coupling design



Standard designation system

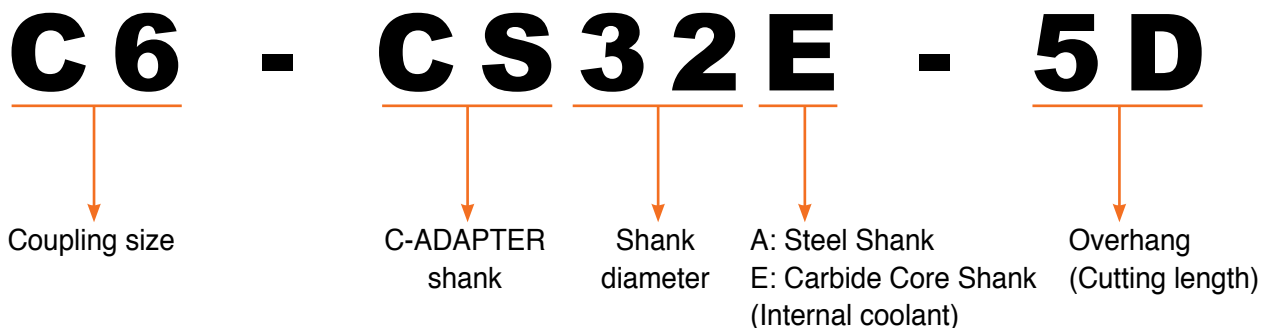

C-ADAPTERs maximum cutting length

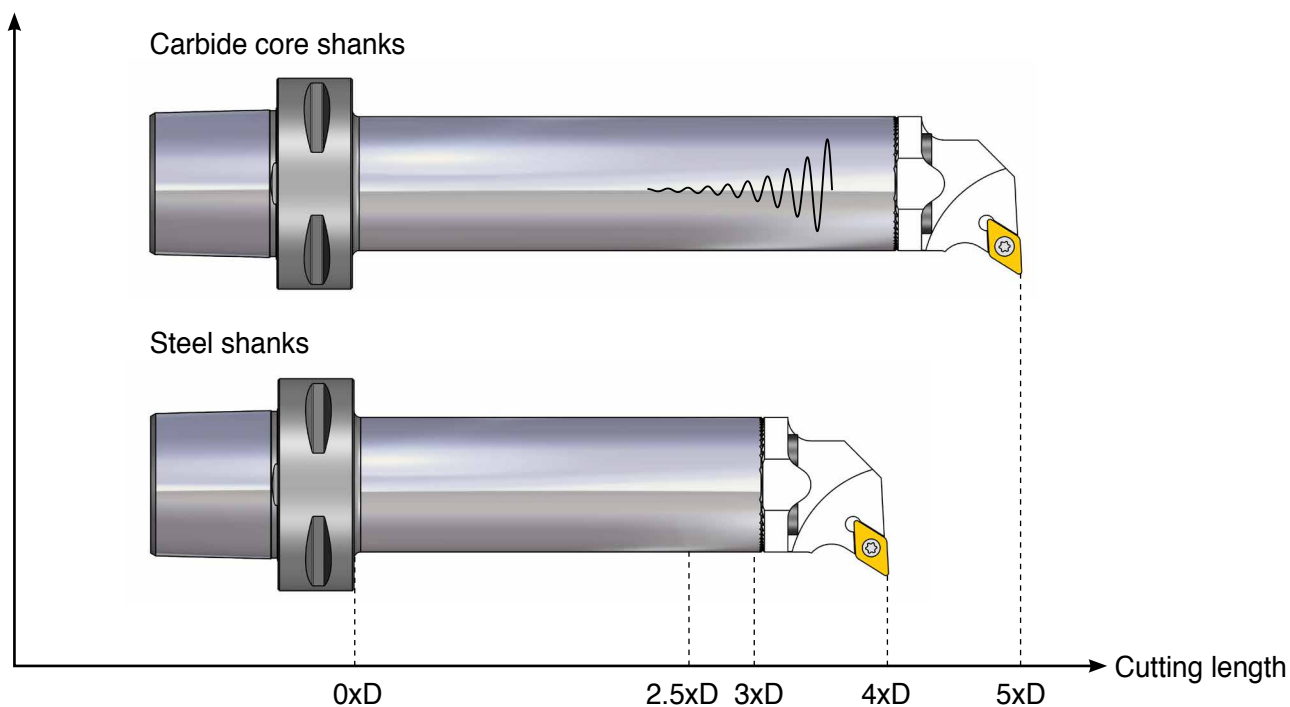

Availability

In stock

Price

Available in the GAL system


Sincerely,
TaeguTec

Bae-dae-wi
Non-Rotating General PM

C...CS



C-ADAPTERs with HUSH-BORE head connection

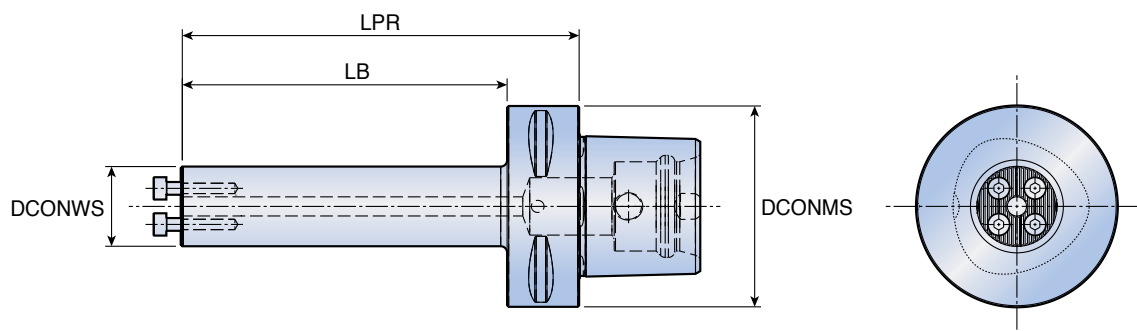

Designation	Dimension (mm)				Coolant hole
	DCONMS	DCONWS	LPR	LB	
C4-CS16A-2.5D	40	16	40	20	●
C4-CS20A-2.5D	40	20	50	30	●
C4-CS25A-2.5D	40	25	55	35	●
C4-CS32A-2.5D	40	32	75	55	●
C4-CS40A-3D	40	40	80	80	●
C5-CS16A-2.5D	50	16	40	20	●
C5-CS20A-2.5D	50	20	50	30	●
C5-CS25A-2.5D	50	25	55	35	●
C5-CS32A-2.5D	50	32	75	55	●
C5-CS40A-3D	50	40	100	80	●
C6-CS16A-2.5D	63	16	40	18	●
C6-CS20A-2.5D	63	20	50	28	●
C6-CS25A-2.5D	63	25	65	43	●
C6-CS32A-3D	63	32	90	68	●
C6-CS32A-4D	63	32	125	103	●
C6-CS40A-3D	63	40	100	78	●
C6-CS40A-4D	63	40	140	118	●
C6-CS16E-5D	63	16	80	58	●
C6-CS20E-5D	63	20	100	78	●
C6-CS25E-5D	63	25	115	93	●
C6-CS32E-5D	63	32	150	128	●
C6-CS40E-5D	63	40	185	163	●

● 5D : Carbide core type

Spare parts

Designation	Screw	Wrench			
CS16	SH M3x0.5X10	L-W 2.5			
CS20	SH M3.5x0.6X10	L-W 2.5			
CS25	SH M4x0.7X12	L-W 3.0			
CS32	SH M5x0.8X12	L-W 4.0			
CS40	SH M6x1X16	L-W 5.0			